

ELECTRIC TELETRUK | 30-19E / 35-22E / 30-22E HL



100% electric. Zero emissions.



MAX CAPACITY
3,000 - 3,500kg

MAX CAPACITY 2M
1,900 - 2,200kg

MAX LIFT HEIGHT
4.0 - 4.4m


GREATER PRODUCTIVITY.

With a choice of three models, the new JCB electric Teletruk range is designed to make the most of your time and space.



LIFT AND LOAD

The unique telescopic boom saves 70m² of space per truck with single side loading. A low 2.2m cab height allows loading and unloading inside containers and trailers.

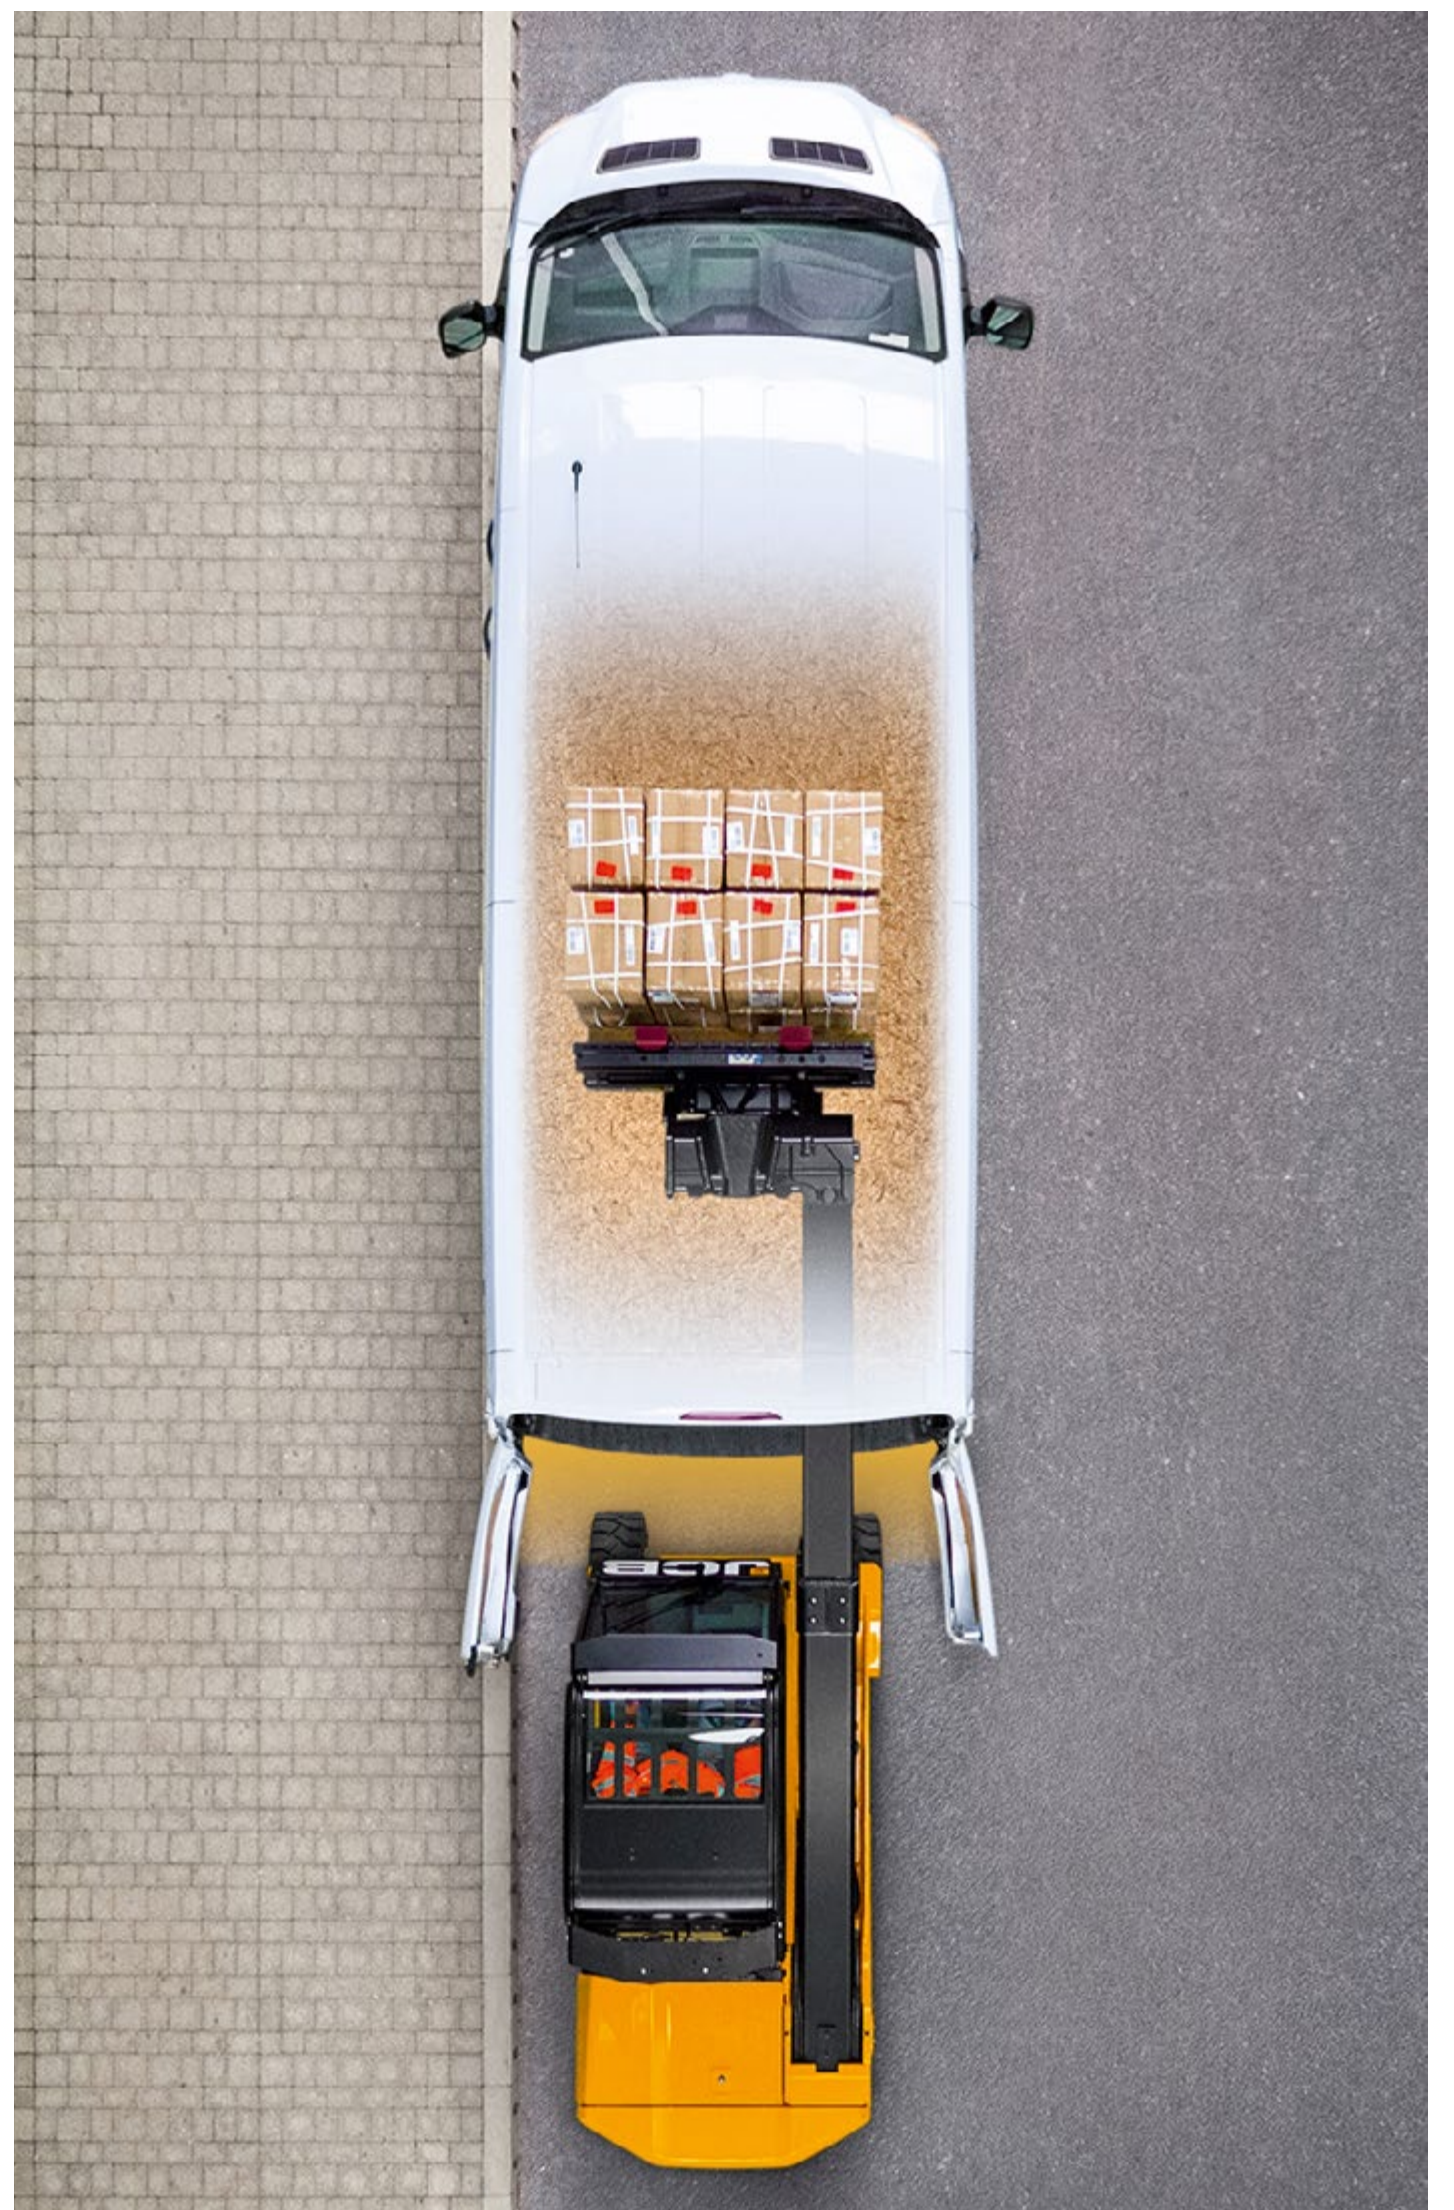

GREATER SAFETY.

With superb visibility and precision control, the Teletruk makes all operators feel in total control within any environment and in any application.



IN COMPLETE CONTROL

Unique Load Motion Control feature prevents forward tip, for increased on-site safety.


GREATER VERSATILITY.

With forward reach, low height and small turning circle, the unique JCB electric Teletruk is the world's most versatile counterbalance lift truck.



HUGE VERSATILITY

With van, truck, container and rail loading, the Teletruk supports all areas of logistics operations.

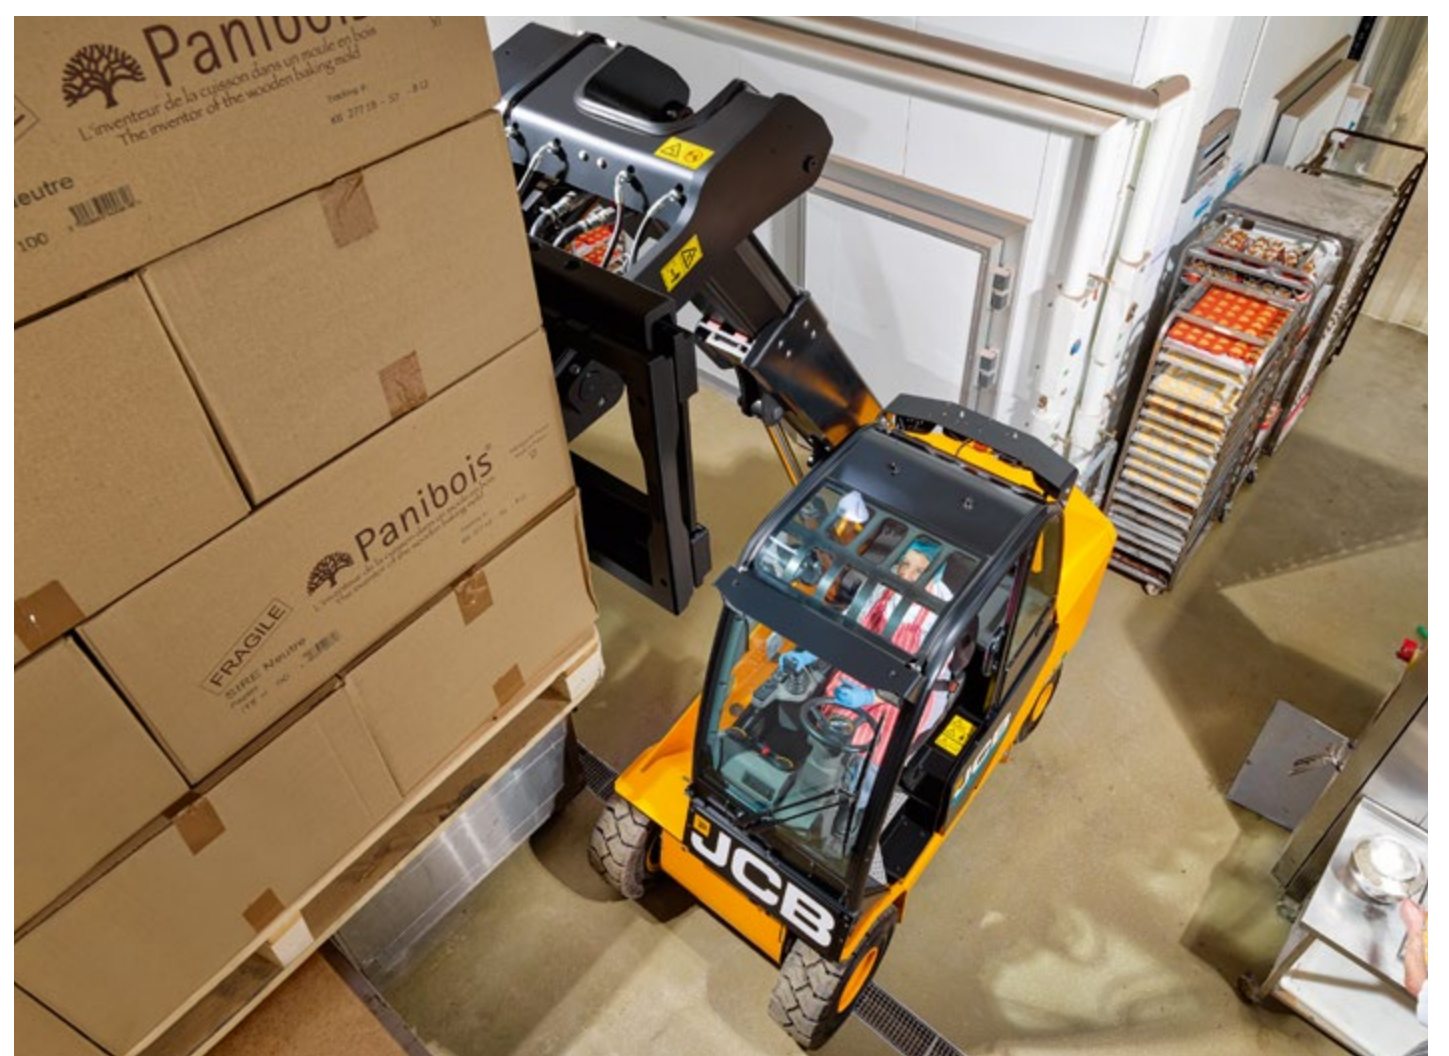

GREATER CARE.

With zero emissions and low noise, both electric Teletruk models are ideal for 24/7 operation in urban environments and noise sensitive areas.



24/7 OPERATION

Machine acceleration can be reduced by 10, 20 or 30%, by pressing the eco button.

GREATER COMFORT.

The latest JCB CommandPlus cab ensures superior operator comfort throughout the working day, enabling you to gain maximum productivity.



COMPLETE VISIBILITY

The Teletruk's unique side-mounted boom design provides unrivalled 360° visibility for the operator.



ELECTRIC TELETRUK | 30-19E / 35-22E / 30-22E HL



SPECIFICATION.

MODEL		30-19E	35-22E	30-22E HL
Lift height	mm	4,000	4,000	4,400
Lift capacities	kg	3,000	3,500	3,000
Capacity at 2m	kg	1,900	2,200	2,200
Aux hydraulics flow	l/min	2 x 70	2 x 70	2 x 70
Travel speed	kph	18	18	18
Turning radius	mm	2,467	2,467	2,467



STANDARD FEATURES.

- Powerful AC drive motors
 - Single lever EH joystick
 - ROPS/FOPS certified cab
 - 90° rear axle spin turn
 - 111° of full carriage rotation
- 2 x 70 l/min auxiliaries
 - Load motion control
 - Indoor/outdoor operation ready
 - JCB LiveLink telematics
 - 2 years warranty



ELECTRIC TELETRUKS
100% ELECTRIC, ZERO EMISSIONS

100% electric. Zero emissions.

FIND OUT MORE



www.jcb.com/electric